

Curso python udemy

interesante

- Numpy: manejo de matrices
- Web Mapping: creación mapas interactivos HTML
- Manejo Webcam
- Bokeh: librería representación gráficos
- Pandas: librería de análisis de datos
- Flask: web development
- openCV: image processing library
- Mobile app: apk
- Web Scraping
- pyinstaller: creación de ejecutables
- pip3 install jupyter notebook

Cheatsheet: Data Types

- Integers are used to represent whole numbers:

```
rank = 10
eggs = 12
people = 3
```

- Floats represent decimal numbers:

```
temperature = 10.2
rainfall = 5.98
elevation = 1031.88
```

- Strings represent text:

```
message = "Welcome to our online shop!"
name = "John"
serial = "R001991981SW"
```

- Lists represent arrays of values that may change during the course of the program:

```
members = ["Sim Soony", "Marry Roundknee", "Jack Corridor"]
pixel_values = [252, 251, 251, 253, 250, 248, 247]
```

- Dictionaries represent pairs of keys and values:

```
phone_numbers = {"John Smith": "+37682929928", "Marry Simpons": "+423998200919"}
volcano_elevations = {"Glacier Peak": 3213.9, "Rainer": 4392.1}
```

- Keys of a dictionary can be extracted with:

```
phone_numbers.keys()
```

- Values of a dictionary can be extracted with:

```
phone_numbers.values()
```

- Tuples represent arrays of values that are not to be changed during the course of the program:

```
vowels = ('a', 'e', 'i', 'o', 'u')
one_digits = (0, 1, 2, 3, 4, 5, 6, 7, 8, 9)
```

- You can get a list of attributes of a data type has using:

```
dir(str)
dir(list)
dir(dict)
```

- You can get a list of Python builtin functions using:

```
dir(__builtins__)
```

- You can get the documentation of a Python data type using:

```
help(str)
help(str.replace)
help(dict.values)
```

Tip: Converting Between Datatypes

Sometimes you might need to convert between different data types in Python for one reason or another. That is very easy to do:

- From tuple to list:

```
cool_tuple = (1, 2, 3)
cool_list = list(cool_tuple)
cool_list # [1, 2, 3]
```

- From list to tuple:

```
cool_list = [1, 2, 3]
cool_tuple = tuple(cool_list)
cool_tuple # (1, 2, 3)
```

- From string to list:

```
cool_string = "Hello"
cool_list = list(cool_string)
cool_list # ['H', 'e', 'l', 'l', 'o']
```

- From list to string:

```
cool_list = ['H', 'e', 'l', 'l', 'o']
cool_string = str.join("", cool_list)
cool_string # 'Hello'
```

As can be seen above, converting a list into a string is more complex. Here `str()` is not sufficient. We need `str.join()`. Try running the code above again, but this time using `str.join(«—», cool_list)` in the second line. You will understand how `str.join()` works.

Cheatsheet: Operations with Data Types

- Lists, strings, and tuples have a positive index system:

```
["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
 0      1      2      3      4      5      6
```

- And they have a negative index system as well:

```
["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
-7      -6      -5      -4      -3      -2      -1
```

- In a list, the 2nd, 3rd, and 4th items can be accessed with:

```
days = ["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
days[1:4]
Output: ['Tue', 'Wed', 'Thu']
```

- First three items of a list:

```
days = ["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
days[:3]
Output: ['Mon', 'Tue', 'Wed']
```

- Last three items of a list:

```
days = ["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
days[-3:]
Output: ['Fri', 'Sat', 'Sun']
```

- Everything but the last:

```
days = ["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
days[:-1]
Output: ['Mon', 'Tue', 'Wed', 'Thu', 'Fri', 'Sat']
```

- Everything but the last two:

```
days = ["Mon", "Tue", "Wed", "Thu", "Fri", "Sat", "Sun"]
days[:-2]
Output: ['Mon', 'Tue', 'Wed', 'Thu', 'Fri']
```

- A dictionary value can be accessed using its corresponding dictionary key:

```
phone_numbers = {"John": "+37682929928", "Marry": "+423998200919"}
phone_numbers["Marry"]
Output: '+423998200919'
```

Cheatsheet: Functions and Conditionals

- Define functions:

```
def cube_volume(a):  
    return a * a * a
```

- Write if-else conditionals:

```
message = "hello there"  
  
if "hello" in message:  
    print("hi")  
else:  
    print("I don't understand")
```

- Write if-elif-else conditionals:

```
message = "hello there"  
  
if "hello" in message:  
    print("hi")  
elif "hi" in message:  
    print("hi")  
elif "hey" in message:  
    print("hi")  
else:  
    print("I don't understand")
```

- Use the and operator to check if both conditions are True at the same time:

```
x = 1  
y = 1  
  
if x == 1 and y==1:  
    print("Yes")  
else:  
    print("No")
```

- Use the or operator to check if at least one condition is True:

```
x = 1  
y = 2  
  
if x == 1 or y==2:  
    print("Yes")  
else:  
    print("No")
```

- Check if a value is of a particular type with isinstance:

```
isinstance("abc", str)
```

```
isinstance([1, 2, 3], list)
# or directly:

type("abc") == str
type([1, 2, 3]) == list
```

Cheatsheet: Loops

A for-loop is useful to repeatedly execute a block of code.

- You can create a for-loop like so:

```
for letter in 'abc':
    print(letter.upper())
```

output

```
A
B
C
```

- As you can see, the for-loop repeatedly converted all the items of 'abc' to uppercase.
 - The name after for (e.g. letter) is just a variable name
- You can loop over dictionary keys as follows:

```
phone_numbers = {"John Smith":"+37682929928","Marry Simpons":"+423998200919"}
for value in phone_numbers.keys():
    print(value)
```

output

```
John Smith
Marry Simpons
```

- You can loop over dictionary values:

```
phone_numbers = {"John Smith":"+37682929928","Marry Simpons":"+423998200919"}
for value in phone_numbers.values():
    print(value)
```

output

```
+37682929928
+423998200919
```

- You can loop over dictionary items:

```
phone_numbers = {"John Smith":"+37682929928","Marry Simpons":"+423998200919"}
for key, value in phone_numbers.items():
```

```
print(key, value)
```

output

```
John Smith +37682929928  
Marry Simpons +423998200919
```

- We also have while-loops. The code under a while-loop will run as long as the while-loop condition is true:

```
while datetime.datetime.now() < datetime.datetime(2090, 8, 20, 19, 30, 20):  
    print("It's not yet 19:30:20 of 2090.8.20")
```

- The loop above will print out the string inside print() over and over again until the 20th of August, 2090.

Cheatsheet: List Comprehensions

A list comprehension is an expression that creates a list by iterating over another container.

- A basic list comprehension:

```
[i*2 for i in [1, 5, 10]]
```

output

```
[2, 10, 20]
```

- List comprehension with if condition:

```
[i*2 for i in [1, -2, 10] if i>0]
```

output

```
[2, 20]
```

- List comprehension with an if and else condition:

```
[i*2 if i>0 else 0 for i in [1, -2, 10]]
```

output

```
[2, 0, 20]
```

Cheatsheet: More on Functions

- Functions can have more than one parameter:

```
def volume(a, b, c):
    return a * b * c
```

- Functions can have default parameters (e.g. coefficient):

```
def converter(feet, coefficient = 3.2808):
    meters = feet / coefficient
    return meters
```

```
print(converter(10))
# Output: 3.0480370641306997
```

- Arguments can be passed as non-keyword (positional) arguments (e.g. a) or keyword arguments (e.g. b=2 and c=10):

```
def volume(a, b, c):
    return a * b * c

print(volume(1, b=2, c=10))
```


- An *args parameter allows the function to be called with an arbitrary number of non-keyword arguments:

```
def find_max(*args):
    return max(args)
print(find_max(3, 99, 1001, 2, 8))
# Output: 1001
```

- A **kwargs parameter allows the function to be called with an arbitrary number of keyword arguments:

```
def find_winner(**kwargs):
    return max(kwargs, key = kwargs.get)

print(find_winner(Andy = 17, Marry = 19, Sim = 45, Kae = 34))
# Output: Sim
```

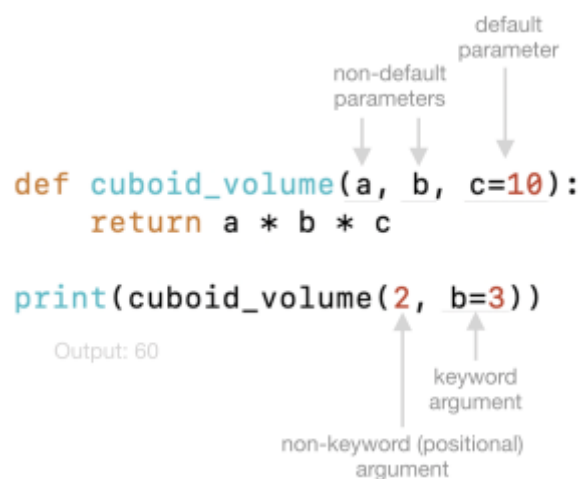

- Here's a summary of function elements:

Cheatsheet: File Processing

- You can read an existing file with Python:

```
with open("file.txt") as file:  
    content = file.read()
```

- You can create a new file with Python and write some text on it:

```
with open("file.txt", "w") as file:  
    content = file.write("Sample text")
```

- You can append text to an existing file without overwriting it:

```
with open("file.txt", "a") as file:  
    content = file.write("More sample text")
```

- You can both append and read a file with:

```
with open("file.txt", "a+") as file:  
    content = file.write("Even more sample text")  
    file.seek(0)  
    content = file.read()
```

Cheatsheet: Imported Modules

- Builtin objects are all objects that are written inside the Python interpreter in C language.
- Builtin modules contain builtins objects.
- Some builtin objects are not immediately available in the global namespace. They are parts of a builtin module. To use those objects the module needs to be imported first. E.g.:

```
import time  
time.sleep(5)
```

- A list of all builtin modules can be printed out with:

```
import sys  
sys.builtin_module_names
```

- Standard libraries is a jargon that includes both builtin modules written in C and also modules written in Python.
- Standard libraries written in Python reside in the Python installation directory as .py files. You can find their directory path with `sys.prefix`.
- Packages are a collection of .py modules.
- Third-party libraries are packages or modules written by third-party persons (not the Python core development team).
- Third-party libraries can be installed from the terminal/command line:
 - Windows:

```
pip install pandas # or use
```

```
python -m pip install pandas # if that doesn't work.
```

- o Mac and Linux:

```
pip3 install pandas # or use  
python3 -m pip install pandas # if that doesn't work.
```

Flask

```
pip install Flask
```

[script1.py](#)

```
from flask import Flask, render_template  
  
app=Flask(__name__)  
  
@app.route("/")  
def home():  
    return render_template("home.html")  
  
@app.route("/about")  
def about():  
    return render_template("about.html")  
  
if __name__=="__main__":  
    app.run(debug=True)
```

[templates/menu.html](#)

```
<!DOCTYPE html>  
<html>  
    <head>  
        <title>Flask app </title>  
        <link rel="stylesheet" href="{{ url_for('static',  
filename='css/main.css') }}">  
    </head>  
    <body>  
        <header>  
            <div class="container">  
                <h1 class="logo">Python Flask test page</h1>  
                <ul class="menu">  
                    <li><a href="{{ url_for('home') }}">HOME</a></li>  
                    <li><a href="{{ url_for('about') }}">ABOUT</a></li>  
                </ul>  
            </div>  
        </header>  
        <div class="container">  
            {%block content%}  
            {%endblock%}  
        </div>  
    </body>
```

```
</html>
```

templates/home.html

```
{%extends "menu.html"%}  
{%block content%}  
    <h2>HOME PAGE</h1>  
{%endblock%}
```

templates/about.html

```
{%extends "menu.html"%}  
{%block content%}  
    <h2>ABOUT PAGE</h1>  
{%endblock%}
```

static/css/main.css

```
body {  
    margin: 0;  
    padding: 0;  
    font-family: "Helvetica Neue", Helvetica, Arial, sans-serif;  
    color: #060;  
}  
  
/*  
 * Formatting the header area  
 */  
  
header {  
    background-color: #DFB887;  
    height: 35px;  
    width: 100%;  
    opacity: .9;  
    margin-bottom: 10px;  
}  
  
header h1.logo {  
    margin: 0;  
    font-size: 1.7em;  
    color: #fff;  
    text-transform: uppercase;  
    float: left;  
}  
  
header h1.logo:hover {  
    color: #fff;  
    text-decoration: none;  
}  
  
/*
```

```
* Center the body content
*/

.container {
  width: 1200px;
  margin: 0 auto;
}

div.home {
  padding: 10px 0 30px 0;
  background-color: #E6E6FA;
  -webkit-border-radius: 6px;
  -moz-border-radius: 6px;
  border-radius: 6px;
}

div.about {
  padding: 10px 0 30px 0;
  background-color: #E6E6FA;
  -webkit-border-radius: 6px;
  -moz-border-radius: 6px;
  border-radius: 6px;
}

h2 {
  font-size: 3em;
  margin-top: 40px;
  text-align: center;
  letter-spacing: -2px;
}

h3 {
  font-size: 1.7em;
  font-weight: 100;
  margin-top: 30px;
  text-align: center;
  letter-spacing: -1px;
  color: #999;
}

.menu {
  float: right;
  margin-top: 8px;
}

.menu li {
  display: inline;
}

.menu li + li {
  margin-left: 35px;
}

.menu li a {
  color: #444;
  text-decoration: none;
}
```

}

From: <https://miguelangel.torresegea.es/wiki/> - **miguel angel torres egea**

Permanent link: <https://miguelangel.torresegea.es/wiki/info:cursos:udemy:python-mega-course?rev=1728549557>

Last update: **10/10/2024 01:39**

